

PT100 FREE EXPRESSIONS

STAINMASTER® PetProtect™ Luxury Vinyl Product Guide



 PHENIX

A pharr FAMILY COMPANY

For more information visit: <http://www.phenixflooring.com/hard-surfaces>

Manufacturing Defect Limited Warranty



What is Covered: PHENIX FLOORING warrants that the STAINMASTER® PetProtect™ Luxury Vinyl flooring products (“Products”) purchased and installed in residential or accepted commercial settings on or after May 1, 2017 will be free from manufacturing defects for a period of 1 (one) year from the date of purchase. All Products must be installed per the Installation Instructions, available at STAINMASTER.com. This Limited Warranty covers any manufacturing defect that appears during normal use.

For purposes of this Limited Warranty, “Residential Setting” means a job installed utilizing one or more Products at a single-family dwelling. “Light Commercial Setting” means a job installed in areas of use defined as environments with light to moderate foot traffic, light point loads and lack of rolling traffic. “Heavy Commercial Setting” means a job installed in areas of use with floors subjected to heavy loads, caster use, heavy point loads and heavy traffic. Examples of both Commercial Settings are listed below:

Light Commercial Setting	Heavy Commercial Setting
Art galleries, banks, bookstores, boutiques, classrooms, clothing stores, conference rooms, gift shops, hospitality rooms, hotel rooms, interior entrance ways, professional offices.	Airports, bus terminals, automobile dealerships, enclosed exterior entrance ways, convention areas, exercise rooms, factories, hospitals, mall common areas, pro shops, retail warehouse-type stores, ramps, stair cases, warehouses.

Who is Covered:

This Limited Warranty is not transferable or assignable and only applies to the original purchaser and to the original owner of the property/unit in which the Products were installed (hereafter “You” or “Your”).

Limited Warranty for Wear:

PHENIX FLOORING warrants that the installed Product will not wear through to the printed film layer under normal use for a period of the warranty coverage. For the purposes of this Limited Warranty, “wear through” means that, as a result of normal use, the wear layer is sufficiently depleted or compromised so that the printed film layer is damaged, altered, or affected.

Limited Warranty for Stains:

For the warranty period, and subject to Your compliance with the care and maintenance instructions found in the Installation Instructions, the installed Products will resist food and beverage stains that occur during normal use (“Covered Stains”). Covered Stains must be sufficient that the affected area of flooring is permanently discolored.

PetProtect™ Stain Limited Warranty:

PHENIX FLOORING warrants that with proper care and maintenance (see Installation Instructions), the installed Products will not stain from accidents (urine, feces, and vomit) caused by domestic pets such as cats and dogs.

Limited Waterproof Warranty:

Products are waterproof and will not be damaged or structurally compromised by normal exposure to surface spills and tracked water/moisture for the life of the Product. Excessive subfloor moisture

is an ideal breeding ground for mold, mildew and fungus that will not harm the Products, but will contribute to an unhealthy indoor living environment if left unattended. Limitations apply as stated below.

What PHENIX FLOORING Will Do:

PHENIX FLOORING will repair or replace manufacturing defects in Products that meet the criteria of this Limited Warranty. The decision either to repair or to replace the affected Products will be made by PHENIX FLOORING, in its sole discretion, and will be limited to the affected area of the Products.

- PHENIX FLOORING will supply new material of the same color, design, and grade, if available; if unavailable or discontinued, PHENIX FLOORING reserves the right to select and supply similar Products. After corrective action is taken on an existing defect, you will continue to receive warranty coverage for the remaining period of Your original warranty.
- If replacement is necessary, the Limited Warranty covers the removal and disposal of the original Products and the cost and installation of the comparable replacement Products, only when and if a professional flooring installer was paid to install the original Products. Labor will be paid per the following schedule and it must be performed by a certified professional flooring installer:
 - Within the first 2 years from the date of purchase - 100% of the labor for reinstall/repair
 - Within years 3-4 from the date of purchase - 70% of the labor for reinstall/repair
 - Within years 5-6 from date of purchase - 50% of the labor for reinstall/repair
 - After 6 years - no labor reimbursement provided
- Any other labor charges, costs for moving furniture, equipment or baseboards, or other charges are Your responsibility and will not be paid by PHENIX FLOORING.
- You must reasonably cooperate with PHENIX FLOORING in its efforts to perform its obligations under these limited warranties.

Preconditions for Limited Warranty Coverage:

This Limited Warranty covers normal use only. The Products must be properly maintained following the preventive care guidelines in the Installation Instructions. The Products must be installed in continuous climate controlled interior environments as stated in the Installation Instructions, available at STAINMASTER.com.

Exclusions from Warranty Coverage:

Only first quality Products, which meet PHENIX FLOORING 's construction and performance standards, will be covered under this Limited Warranty. This Limited Warranty excludes:

- Products that have not been acclimated per the Installation Instructions.
- Improper installation or Products not installed according to the Installation Instructions and accepted industry practices from the accredited organizations listed in the Installation Instructions.
- Labor costs will not be covered when Products with visual defects greater than or equal to 1cm are installed. In that case, only replacement Products will be provided.
- Improper maintenance such as Product dulling by soaps, vinegar solutions, detergents, harsh chemicals, dressings, one-step cleaners, or wax.
- Hazing or finish-related issues caused by grout when used with STAINMASTER® groutable tiles.
- Performance of Products installed over foam-type, rubber, cork or other compressible type underlayments. Guarantees of performance should be provided by the manufacturer who states their product is suitable for use with luxury vinyl flooring.
- Flooring issues, conditions, damage or defects caused by improper installation techniques, use of improper adhesives or incorrect application of adhesives, improper underlayments, inadequate subfloors or subfloor preparation, flooring installed against standard accepted industry practices.
- Stains, fading, discoloration, or moisture problems due to use of rubber or rubber-backed mats. Staining or changes in color caused by dyes tracked from carpet, fertilizers, coal, tar, driveway sealers, oil drippings or other similar materials; faded or discolored by sunlight or heat generation.
- Product installed over unstable, unsuitable, or improperly prepared sub floors, wet/cold floors, and/or radiant-heated floors more than 80°F.

- Problems or damage due to moisture and/or alkalinity in sub floor; discoloration or bond release from hydrostatic pressure or excessive moisture caused by flooding, plumbing, and appliance leaks; water leakage from doors, windows, and roofs.
- Damage from or growth of mold and mildew caused by excessive moisture in the environment or substrate that has been trapped under the flooring, including flooring installed outdoors or subjected to prolonged water exposure.
- Cuts, scratches, gouges, indentations and punctures caused by sharp objects, narrow wheels, metal furniture glides, etc. Non-rubber walk-off mats are to be used at all egress points and shall be of sufficient depth and width to capture grit, dirt and abrasive debris.
- Indentations or damage by narrow tipped heels, vacuum cleaner beater bars, heavy rolling loads, caster wheels, furniture and chairs without proper floor protectors and furniture rests, dropping of metal or heavy objects. Furniture, appliances and movable fixtures should have a plastic or nylon protector at least 2” in diameter; chair casters / wheels should be a minimum of 2” in diameter and not be metal-type or narrower than 1” in width. Chair mats and protectors shall be used under office chairs including use in residential settings.
- Cracking, warping, delamination, curling or other phenomena caused by excessive heat applied to the flooring.
- Damage caused by burns, cigarette/cigar burns, intentional abuse, flooding, fires, and other disasters.
- Flooring installed in areas not intended for solid vinyl plank or tile.

How Long is the Coverage:

The Products’ Limited Warranty document covers Products that are applied in a Residential Setting or accepted Commercial Setting. PHENIX FLOORING reserves the right to classify each installation use. The following table outlines the warranty coverage timeframes (manufacturing defect warranty is for a period of 1 year from the date of purchase):

Wear Layer	Residential Warranty Coverage	Light Commercial Warranty Coverage	Heavy Commercial Warranty Coverage
20 mil	Lifetime	10 years	10 years

What You Must Do to Report a Claim:

Manufacturing defects must be reported within 30 days of first notice of defect in installed area. Always retain proof of purchase. Notify PHENIX FLOORING of any defect and provide the following information:

- An explanation of the issue and what caused it;
- The location of the issue, and in what other areas/rooms, if any, Products are installed;
- Photographs of the affected area; and
- Proof of purchase.

How to Contact Us:

For warranty service, contact PHENIX FLOORING, LLC via email at CLAIMS@PHENIXFLOORING.com, or call us at 1-800-609-9557. Hours are 8 AM to 5 PM EST, Monday through Friday. For the most up-to-date information about this limited warranty, please refer to our website at STAINMASTER.com.

LIMITATIONS: YOUR SOLE AND EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY SHALL BE REPAIR OR REPLACEMENT PRODUCT AND ASSOCIATED LABOR COSTS (IF APPLICABLE) FOR THE PORTION OF THE PRODUCTS THAT DOES NOT CONFORM TO THE WARRANTY AS PROVIDED HEREIN. PHENIX FLOORING SHALL NOT BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, SPECIAL, OR PUNITIVE DAMAGES OR EXPENSES, OR FOR LOST OR PROSPECTIVE PROFITS, ARISING OUT OF THE PURCHASE OR USE OF THE

PRODUCTS OR RESULTING FROM THE BREACH OF THIS LIMITED WARRANTY. IN NO EVENT SHALL PHENIX FLOORING 'S CUMULATIVE LIABILITY EXCEED THE PRODUCT REPAIR, REPLACEMENT AND LABOR COSTS. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE OF THIS WARRANTY. TO THE EXTENT PERMITTED BY LAW, ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED.

State Rights:

This Limited Warranty gives You specific legal rights, and You may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to You.

DISPUTE RESOLUTION PROVISION:

PHENIX FLOORING and You agree that any controversy or claim arising out of or relating to the purchase, installation or use of the Products, including any claim for breach of warranty (a "Dispute"), may be settled only by BINDING ARBITRATION or in a small claims court, if the Dispute is within the jurisdiction of the small claims court and there will be NO JURY TRIAL. PHENIX FLOORING and You agree that the American Arbitration Association (AAA) shall administer any arbitration in accordance with its Commercial Arbitration Rules and its Consumer-Related Dispute Supplementary Procedures and incorporated fee schedule, and judgment on the award rendered by the arbitrator may be entered in any court having jurisdiction thereof. The parties intend that the Dispute will be settled in individual (bi-lateral) and not class arbitration, do not consent to the incorporation of the AAA Supplementary Rules for Class Arbitration into the rules governing arbitration under this Dispute Resolution Procedure, and hereby waive any right to arbitrate a Dispute through representative or class arbitration. The parties intend that the arbitrator decide all issues of substantive arbitrability, including his/her own jurisdiction.

Law Governing Arbitration Provision:

The Dispute Resolution Provision above establishing the arbitration process is governed by the Federal Arbitration Act (FAA), 9 U.S.C. §§ 1-16.

Information on the AAA and Arbitration Filing Requirements and Fees:

The website for the AAA may be accessed at www.adr.org. The AAA Commercial Arbitration Rules and the Consumer Arbitration Rules (with associated fee schedule) may be accessed at <https://www.adr.org/Rules>. For more information on AAA arbitration, contact: American Arbitration Association, Case Filing Services, 1101 Laurel Oak Road, Suite 100, Voorhees, NJ 08043. Toll Free number: 877-495-4185. Fax number: 877-304-8457. Email: casefiling@adr.org.

WAIVER OF JURY TRIAL: PHENIX FLOORING AND YOU UNCONDITIONALLY WAIVE ANY RIGHT TO TRIAL BY JURY IN ANY ACTION, PROCEEDING OR COUNTER CLAIM ARISING OUT OF OR RELATING TO ANY DISPUTE ARISING UNDER THIS AGREEMENT. IF FOR ANY REASON A CLAIM PROCEEDS IN COURT RATHER THAN THROUGH ARBITRATION, PHENIX FLOORING AND YOU AGREE THAT THERE WILL NOT BE A JURY TRIAL. YOU UNDERSTAND THAT BY THIS AGREEMENT YOU ARE WAIVING THE RIGHT TO HAVE ANY DISPUTE HEARD AND RESOLVED IN COURT BY A JURY.

PT100 Free Expressions Specification Sheet

Feature	Tile	Plank
Product Type	Pet Protect® Luxury Vinyl	Pet Protect® Luxury Vinyl
Material Composition		Solid Vinyl
Summary	Solid Vinyl	
Plank Length	19.69"	39.37"
Plank Width	19.69"	7.87"
Backing	NA	NA
Total Thickness	5mm	5mm
Wear Layer Thickness	20 mil	20 mil
Edge Design	Micro Bevel	Micro Bevel
Embossing	Natural, Random	Natural, Random
Acclimation Time & Temp.	48 hrs. prior to installations, 65-85°F	48 hrs. prior to installations, 65-85°F
Installation Type	Looselay, grout-able when glued down	Looselay, grout-able when glued down
Installation Area with no transitions (LF and SF)	No limitation	No limitation
Water Resistance	Waterproof	Waterproof
Approved for Basement Installations	Yes	Yes
Residential Warranty # of Years	Limited Lifetime	Limited Lifetime
Commercial	Heavy, 10 years	Heavy, 10 years
Special Tools Needed	3-section 100 lb roller; trowel, if glue down (see installation instructions)	3-section 100 lb roller; trowel, if glue down (see installation instructions)
Finish	Claw-Scratch Shield	Claw-Scratch Shield
Prop 65 Compliant	Yes	Yes
Phthalate Free	Yes	Yes
FloorScore Certified	Yes	Yes
<u>Box</u>		
Pieces per Box	6	8
Square Feet per Box	16.146	17.222
Weight per Box	29.94	31.92
<u>Pallet</u>		
Boxes per Pallet	56	55
Square Feet per Pallet	904.17	947.22
Weight per Pallet	1675.95	1755.76

Plank Available in 8 Colors				Tile Available in 1 Color	
<i>Color #</i>	<i>Color Name</i>	<i>Color #</i>	<i>Color Name</i>	<i>Color #</i>	<i>Color Name</i>
P403	Toasted Brown	P485	Lacebark	S253	Odessa Gray
P410	Woodland	P497	Rocky Mountain		
P413	Deep Cloud	P776	Dove		
P453	Natural	P787	Pebble		

Luxury Vinyl Loose Lay Installation Guide

Grout-able when glued down



ALWAYS CHECK STAINMASTER.COM FOR THE LATEST INSTALLATION, WARRANTY AND MAINTENANCE INSTRUCTIONS. IT IS THE RESPONSIBILITY OF THE INSTALLER TO ENSURE THAT THE MOST CURRENT DOCUMENTS ARE USED DURING INSTALLATION OF STAINMASTER® PetProtect™ LUXURY VINYL FLOORING.

PRODUCT HANDLING AND SITE CONDITIONS

1. Inspect your shipment to ensure that all cartons are of the same lot /manufacturing run. **Contact Phenix 800-609-9557 Ext. 1201 before installing product from differing runs or lots.**
2. **IMPORTANT:** Deliver to job site and acclimate all material, including maintenance products, at 65° – 85° Fahrenheit (18° to 29° Celsius) for a minimum of 24 (recommended 48) hours prior to installation.
3. The space where flooring is to be installed shall be held at 65° – 85° Fahrenheit (18° to 29° Celsius) for an additional 48 hours after installation, and never drop below 65° Fahrenheit (18° Celsius) from this point forward. Dramatic temperature changes should also be avoided.
4. Loose lay vinyl floors should not be exposed to direct sunlight for extended periods of time, so suitable window coverings are recommended. In areas with heavier lighting, the use of full-pattern of adhesive is desired and planks should be laid perpendicular to the light source (window or doors).
5. To prevent damage, flooring should be installed after all other major renovations. Fiber reinforced floor protectors are recommended to prevent any damaging while moving large and heavy items.
6. Prior to laying floor, the area should be dry, smooth, level, structurally sound, and free of all contaminants, including, but not limited to: dust, solvents, paint, wax, oil, grease, residual adhesive, adhesive removers, curing, sealing, hardening or parting compounds, alkaline salts, excessive carbonation or laitance, mold, mildew.

GENERAL GUIDELINES – LOOSE LAY VINYL FLOORING

All instructions and recommendations should be followed for an ideal installation.

1. To minimize shade variation, install flooring by mixing product from several different cartons.
2. Any subfloor/underlayment patching must be done with a non-shrinking, water-resistant Portland cement patching compound.
3. To prevent floor movement, a band of adhesive (equal to the width of one plank or tile) should be applied around the perimeter of the room, paying particular attention to entryways, which encounter heavier foot traffic. Use an adhesive recommended for vinyl flooring. Consult with your retailer for more information.

SUBFLOOR INFORMATION

Although STAINMASTER® PetProtect™ flooring is designed for “loose-lay” installation, proper preparation of the subfloor is still critical for successful installation. Rough or uneven subfloor may telegraph through the flooring, resulting in an unsightly surface and causing excessive wear on high spots.

Detailed instructions for subfloor testing and preparation, including a list of approved subfloor substrates can be found in the Addendum on the back side.

Note: All substrates, regardless of composition, MUST be smooth and flat to within 1/8" (3.18mm) or achieve an “F50” rating by use of mechanical grinding/sanding or suitable Portland cement-based patching and leveling compounds.

WARNING!

DO NOT SAND, DRY SWEEP, BEADBLAST, SHOTBLAST OR USE ANY OTHER MECHANICAL MEANS TO PULVERIZE EXISTING TILE FLOORING, BACKING, LINING FELT, ASPHALTIC "CUT-BACK" OR OTHER ADHESIVES. THESE PRODUCTS MAY CONTAIN ASBESTOS FIBERS AND/OR CRYSTALLINE SILICA. AVOID CREATING DUST. INHALATION OF SUCH DUST IS A CANCER AND RESPIRATORY TRACT HAZARD. SMOKING BY INDIVIDUALS EXPOSED TO ASBESTOS FIBERS GREATLY INCREASES THE RISK OF SERIOUS BODILY HARM. UNLESS POSITIVELY CERTAIN THAT THE PRODUCT IS A NON-ASBESTOS CONTAINING MATERIAL, YOU MUST PRESUME IT CONTAINS ASBESTOS. REGULATIONS MAY REQUIRE THAT THE MATERIAL BE TESTED TO DETERMINE ASBESTOS CONTENT.

INSTALLING STAINMASTER® PETPROTECT™ LOOSE LAY LUXURY VINYL FLOORING

1. Choose the plank design layout, which may include random patterns, staggered designs, or diagonals. Note: planks look best when lying parallel to the longest walls in the room. For staggered designs, it is recommended for the stagger to be at least the width of the plank. For tiles, staggers look best if $\frac{1}{2}$ the width (point-to-point is not recommended).
2. To achieve the proper fit, loose lay flooring can be cut using a guillotine-type cutter or a utility knife. Keep knife blades sharp for easy, accurate and safe cuts. In certain situations, it may be necessary to heat the planks to achieve a cut; minimal heat should be applied by using the lowest setting on a standard hair dryer. After heating, carefully make cuts using a sharp utility knife.
3. While installing, be sure to not disturb tiles and planks that have already been laid. If a piece becomes dislodged, simply peel it up and reinstall, or use of a scrap piece to tap back in place.

Adhesives

Adhesives recommended for vinyl flooring are designed to be used on most interior installations over most concrete and wood substrates, and other approved substrates that are properly prepared and leveled.

Trowel-grade method

This method requires a trowel with a u-notch of $\frac{1}{16}$ " x $\frac{1}{32}$ " x $\frac{1}{32}$ ".

1. For porous substrate installation, the adhesive should be allowed to dry to the touch sufficient to prevent slippage. Loss of adhesion can result if the flooring is not installed within the working time listed on the directions of the adhesive.

2. For non-porous installation, allow the adhesive to dry to the touch with no transfer of adhesive to the finger (approximately 20–30 minutes) and install the flooring within 60 minutes.

Do not install flooring into wet adhesives on non-porous substrates.



Aerosol spray-grade adhesive method

1. Recommended spray adhesive can be used on porous and non-porous substrates. Non-porous substrates may require a lighter application of adhesive and should be tested in a small area before beginning installation.


2. Spray pattern should be enough that one 22 oz. can produces a spread rate of 150 ft² for a permanent application and 185 ft² for a pressure sensitive application.

3. To apply the adhesive, shake the can well then point the can downwards towards the floor. Press the side of the nozzle tip as you slowly walk back and forth to achieve full coverage (details of application listed in the "Installation of Flooring" Section below); **do not use a sweeping motion**. Clean up all drips when complete.

4. Allow the adhesive to dry completely to the touch with no transfer to fingers. Open time will vary according to spray pattern, substrate and ambient conditions.

5. Working time should not exceed 4 hours, so be cautious as to how large of an area is sprayed.

Coverage patterns: 150 ft² 185 ft²

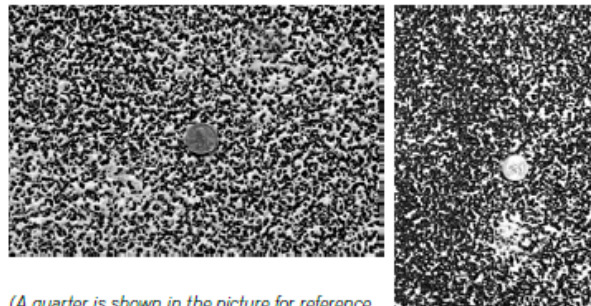

Layout

1. Find the center of the room and dry lay a section of tile/plank from the center line to one wall prior to permanently installing. Ensure that the pattern is centered and fits well. Measure the border cuts along the wall and compare to the criteria below. If adjustments are needed, adjust the first row at the centerline.
2. Planks should never be less than 9" long or less than half of the width of the plank and avoid small pieces in border areas.
3. Tiles should not be less than 6" in length or width and avoid small pieces in border areas. Tiles are designed to be laid in any fashion with the most popular being brick/ashlar patterns. All tile sizes and patterns look best when the layout is balanced.

Installation of flooring

1. Before spreading adhesive, strike a parallel chalk line to the centerline of the length of the room approximately 2' to 3' from the wall (actual position and starting point is based on the dry layout conducted earlier).
2. Apply adhesive in small workable sections based on the trowel or aerosol method. Note: over application of adhesive is discouraged.
3. Begin laying the first row of flooring into the adhesive, keeping a 1/8" gap along all vertical surfaces. Be sure to stagger all end joints by at least 6" or the width of one plank. Vary the length of your planks during installation to ensure that end joints are not bunched and a randomness is achieved in the pattern.
4. Lay the flooring, working towards the first wall from your starting line. Tightly butt the edges together by tapping, using a scrap piece of flooring. Make sure that the runs are parallel to your centerline or layout lines.
5. Once your starter rows are secure and the flooring planks/tiles are tightly butted together, apply adhesive to the next working section, and continue to lay floor as above. Continue in this manner until all pieces are installed.
6. After all pieces are laid, roll the area using a 3-section 100 lb. roller. This ensures proper bonding of the flooring to the adhesive.

Installing with grout

Product Handling and Limitations

1. Store grout indoors in a cool, dry location and keep away from excessive heat. Maintaining temperature range of 60° – 100°F (15° – 38°C) during use and drying.
2. Grout is freeze/thaw stable to –10°F. If grout does get frozen, slowly bring material back to room temperature and mix per instructions.
3. Follow all instructions, cautions, limitations, storage recommendations and usage recommendations of the grout manufacturer. Consult with grout manufacturer for latest instructions on use of their product. Use of a rigid rubber float is recommended.
4. Grout joints shall be a minimum of 1/16" and not greater than 3/16". Use spacers for consistency. Remove all spacers prior to applying grout.
5. Be sure you have the proper amount of grout before beginning the job. Approximate coverage of grout with STAINMASTER® PetProtect™ Luxury Vinyl Flooring is shown in the table below.
6. Tiles must be clean and well bonded to the substrate before grout is applied.
7. Wait 24 hours after installation to apply grout.
8. Do not use epoxy grouts, such as STAINMASTER™ Stain Proof Grout.

Tile Size	Grout	Joint	Width
	1/16" (1.59 mm)	1/8" (3.18 mm)	3/16" (4.76 mm)
20" x 20" x .20" (500 x 500 x 5 mm)	600 sq. ft. (55.74 m ²)	300 sq. ft. (27.87 m ²)	200 sq. ft. (18.58 m ²)
8" x 40" x .20" (200 x 1000 x 5 mm)	400 sq. ft. (37.16 m ²)	200 sq. ft. (18.58 m ²)	130 sq. ft. (12.08 m ²)

Installing the Grout

1. Area, including joints, must be clean, dry, and free of dirt, dust and debris.
2. Begin grouting in one corner of the work area away from the exit, working across the room and backwards toward the exit.
3. Grout no more than 10 square feet (3 square meters) at a time.
4. Using the rigid grout float, put a small amount of grout on the long edge of the float and firmly press the grout into the grout joint. Do not work the grout across the face of the tile in a circular or swishing motion. Continue to work in this manner around the edges of the tile in your working space.

5. Joints should be fully filled and free of gaps and voids. Grout should be flush with the bottom of the bevel or just below the edge of the finished edge of the tile.
6. Use the short edge of the grout to remove excess grout from the joints. Hold the float at a 90° angle and move diagonally down the length of the grout joint. Excess grout should be returned to the container for continued use.
7. Grout should be continually cleaned up during grouting. Use a clean, non-abrasive sponge specifically designed for grouting. Grout sponge should be damp-dry for optimal cleaning- do not introduce large amounts of water on the grout joints.

Initial grout cleaning (during installation for the small work area)

1. For best results, wait 10 minutes before beginning clean-up to allow the grout joint some time to firm up so it is not pulled out of the joint during clean-up process. Do not wait longer than 40 minutes.
2. To clean, first soak sponge in cool clean water. Wring out most excess water, then pat the surface of the tile with the damp sponge to loosen the film. Next, rinse the sponge in water a second time and wring out excess water completely.
3. Use the damp sponge in a light, circular motion to smooth joints and clean film from the tile. Avoid using excessive amounts of water on the grout joints.
4. Turn sponge over to a clean side and draw diagonally across tiles to remove any remaining film.
5. For optimal results, follow these final clean-up steps: moisten a towel with clean water, wring out excess, then drag a damp towel across surface diagonally. This will pick up remaining film.
6. If a light haze remains after cleaning, do not attempt to remove it with the sponge. Instead, leave the haze on the surface and remove the next day with a damp sponge. Haze will easily come off of most tile surfaces.

NOTES:

If excess water is used in the sponge during clean-up, minor cracks or pinholes can develop. If the grout is over-worked, it may appear to shrink down into joint. Should any of these things occur, simply apply a second coat to the affected areas. You must allow your initial application to cure for 24 hours prior to your second application.

Restrict traffic on the finished grout for 24 hours (light foot traffic) and 72 hours for heavy traffic and pets. Allow 7 days for grout to achieve final cure which includes hardness and stain resistance. ALLOW 7 DAYS BEFORE EXPOSURE TO WATER.

Final Clean-up (if any haze exists)

- a. If a haze exists on the day after installation, simply wipe it clean with a damp sponge.
- b. If a sponge is not effective, use a soft, white scrub pad in a circular motion to remove the grout haze from the face of the tile. A small amount of mild detergent in warm water should be used also.
- c. Use a damp, clean sponge or white towel to wipe off the remaining grout haze, rinsing the sponge/towel often and changing the water often.

AFTER INSTALLATION

1. Be sure planks are set, flat and have tight edges.
2. Re-roll the entire installation along the perimeter and where adhesive was used with the 3-section 100 lb. roller. If necessary, weigh down any loose planks overnight to ensure bond.
Note: Adhesive can be carefully reactivated using a heat gun after drying to re-install planks.
3. Clean adhesive residue from the face of the flooring:
 - a. Wet adhesive residue can be wiped away with a clean, white cloth dampened with warm, soapy water. Do not use a soaked cloth as excess water can seep between the seams leading to adhesion failure.
 - b. Dry adhesive residue can be cleaned with a clean cloth and mineral spirits or denatured alcohol, used sparingly. Carefully follow the directions on the chemical's container. Improper use of any chemical can harm the finish of the flooring product. Do not pour soapy water, mineral spirits or denatured alcohol directly on the flooring.
 - c. Epoxy or urethane adhesives must be cleaned while wet according to the adhesive manufacturer's instructions, generally found on the container label.
4. Adhesives should be cured according to the following guidelines:
 - a. No foot traffic should take place for a minimum of 12 to 24 hours after installation. Failure to adhere to this guideline may result in shifting of planks, oozing of adhesive through seams or permanent indentations.
 - b. Do not allow heavy loads, rolling traffic, furniture or fixtures on the floor for 24–48 hours after installation.

- c. The product warranty will be voided in the event that these are not properly followed.
5. In the event that the flooring installation is not the last portion of the construction project. Wait 24 hours then utilize a reinforced fiber protective board or a heavy kraft paper (min. 60 lbs.) and cover the floor. Failure to wait 24 hours before covering can impact adhesive curing.

MAINTENANCE

1. Wait 7 days after installation is completed and thoroughly clean the floor using a neutral pH cleaner. Rinse the floor thoroughly and allow to dry.
2. If necessary, a slow (175rpm) buffer can be utilized with a white, non-abrasive pad to remove heavier deposits.
3. Sweep, vacuum or dust mop the floor as needed to remove dust, dirt and grit. In high traffic areas, this may be a daily or twice daily procedure. Use only vacuums that do not have bristle beater bars.
4. Clean liquid spills immediately to prevent the possibility of stains, slips, or falls.
5. Damp mop the floor as needed to remove dirt and stains.
6. Use a neutral pH cleaner and a red pad if needed to remove ground in dirt. Soft bristle brushes can also be used on flooring with embossed surfaces.
7. Check STAINMASTER.com for more information on stain cleaning.

PREVENTATIVE STEPS

1. Use mats at all entry areas to keep dirt, sand and water off of the floor. Mats should have a non-staining back. Rubber backed mats are not recommended. Clean the mats on a regular basis.
2. Furniture shall use protective glides (of at least 1" in diameter) or felt pads to minimize the chance of indentations or scratching to the surface of the floor. Do not use narrow chair glides.
3. When moving heavy furniture, appliances or fixtures, use protective boards or appropriate furniture movers designed for use over hard surface flooring.
4. Protect the floor from direct sunlight by using appropriate window coverings.
5. Use chair mats at desks to prevent damage from chair legs or casters.
6. Avoid use of metal or razor scrapers to remove dirt, residues, or other marks from flooring. This will damage the protective wear layer of the vinyl flooring.

ADDENDUM

APPROVED SUBFLOOR SUBSTRATES

- APA registered underlayment, sanded face exterior grade with minimum rating of C-C plugged face.
- APA registered exterior grade plywood sanded face with ratings as follows: APA A-B, A-C, B-B, B-C, C-C plugged face.
- Single layer Sturd-I-Floor rated panels (minimum 23/ 32" thickness) with sanded face. Check for jobsite damage before using as underlayment if panels were exposed to construction traffic or weather prior to installation.
- APA Rated underlayment veneer panels.
- APA Approved/Rated OSB panels minimum of 23/32" thickness. Must follow all OSB installation guidelines and only use recommended adhesives.
- Properly prepared and well bonded existing resilient floor covering.
- Cement Terrazzo, Epoxy terrazzo, ceramic tile, marble – must be properly prepared; all grouts are patched with appropriate patching compounds or leveler.
- Certain metal floors – all gaps are patched with appropriate patching compounds or leveler.
- Old adhesive residue- must be properly prepared with embossing leveler.
- Radiant heated floors where heat does not exceed 85°F (29°C).

The following are not approved substrates for STAINMASTER® PetProtect™ Luxury Vinyl flooring:

- Rubber, cork or asphalt tiles.
- Textured or cushion backed resilient flooring.
- "Sleeper" floor systems.
- Plywood floors that have been installed directly over a concrete slab.
- Luan, particle or chip.
- Masonite™ or other hardboard underlayment.
- CCA (pressure treated), oil treated or other coated plywood.
- CDX or other plywood with knots or open defects.
- Underlayment made of pine or other soft woods.
- Hardwood flooring.

- Paint, wax, oil, grease, residual adhesive, mold, mildew, and other foreign materials that might prevent proper adhesion or adversely react with the vinyl flooring.
- Other uneven or unstable substrates.

SUBSTRATE PREPARATION

All substrates must be properly prepared and tested according to the following guidelines.

Concrete Subfloors

Although this flooring is not susceptible to damage from moisture, excessive subfloor moisture should be remediated to prevent growth of mold, mildew and fungus, which can contribute to an unhealthy indoor living environment.

1. Concrete slab construction shall adhere to industry standards for concrete mixing, curing and drying, to prevent moisture problems.
2. On-grade and below-grade slabs should be installed with a suitable vapor retarder directly underneath the concrete slab.
3. New concrete shall be properly cured and dried prior to the installation of the flooring. Curing agents, surface hardeners and other membranes or compounds shall be mechanically removed immediately after initial cure to allow the slab to properly dry before installation. Approximately 30 days per 1" of slab thickness.
4. Concrete substrates should be properly prepared according to ASTM F710-11, Preparing Concrete Floors to Receive Resilient Flooring.
5. All concrete substrates, regardless of grade or age of slab, must be properly tested using one of the methods outlined for warranty to apply. Acceptable test method is the ASTM F 2170 In Situ Relative Humidity. Testing shall be conducted according to the relevant ASTM documentation and instructions of the manufacturer of the testing equipment. RH % of the slab should not exceed 75%.
6. Concrete Alkalinity / pH Test shall be conducted in accordance with ASTM standards and instructions provided by the adhesive manufacturer. Acceptable level of pH in the substrate is 7.
7. Surface porosity testing shall be conducted according to ASTM standards or adhesive manufacturer's guidelines. If no such guideline exists, an application of a few drops of clean, potable water shall be placed on the surface of the concrete in an area the approximate size of a dime or 5/8". If the water is absorbed within 2–3 minutes, then the surface shall be deemed to be porous. If the water beads or is not absorbed, then the slab shall be treated as non-porous.

Gypsum and Lightweight Cellular Concrete Substrates

Gypsum and lightweight concrete subfloors and substrates should conform to appropriate ASTM standards. Unprimed gypsum and gypcrete surfaces may have a dusty surface and an open, porous surface, which will lead to an adhesion failure, if not properly sealed and treated. It is the responsibility of the installation contractor to obtain verification from the general contractor, architect, owner or party responsible for the site that the gypsum was properly sealed with the gypsum manufacturer's recommended sealer. If this data is not available, conduct testing according to the appropriate ASTM Test Method for Gypsum Surfaces.

1. Conduct a surface porosity test to ensure that the surface is properly sealed. If the water is quickly absorbed, stop the installation and contact Phenix Technical Support, 1001 Enterprise Drive, Dalton GA 30721 or call 800-609-9557 ext. 1201 or email Jponders01@phenixflooring.
2. Check moisture content of the gypsum substrate via the appropriate method according to the ASTM Standards listed above. Moisture content of the subfloor/substrate shall not exceed the adhesive requirements or 75% RH or 3 lbs./1,000 sq. ft./24 hrs. MVER. When using the D4263 Test Method, no discoloration of the surface should be found.
3. All patching compounds shall be recommended for use with gypsum, gypcrete or lightweight cellular concrete surfaces by the patching compound manufacturer. Follow the manufacturer's instructions regarding mixing, use and application.
4. All gypsum surfaces must be properly primed according to the gypsum manufacturer's instructions; or where applicable. Follow the instructions of the adhesive manufacturer if there is no recommendation from the gypsum manufacturer.

Wood Subfloors

1. All wood substrates shall be prepared according to ASTM F1482-04 Installation and Preparation of Panel Type Underlays to Receive Resilient Flooring.
2. All wood panels for use under STAINMASTER® PetProtect™ Luxury Vinyl flooring must be smooth, flat, structurally sound and free of deflection.
3. A combination of wood subfloor and panel underlayment construction shall be a minimum of 1" in total thickness.

4. There shall be at least 18" of well-ventilated air space beneath all wood subfloors. Crawl spaces shall be insulated and protected by a suitable vapor barrier.
5. Wood subfloors installed directly on concrete or over "sleeper" joist systems are not acceptable for use under STAINMASTER® PetProtect™ Luxury Vinyl flooring.
6. Panels designed as suitable underlayment shall be at a minimum 1/4" in thickness, dimensionally stable, fully sanded face to eliminate grain texture or show through, and have a written manufacturer's warranty and installation instructions.
7. Panels shall be installed according to manufacturer's instructions regarding stapling pattern, sanding and filling of joints, and acclimation to installed environment.
8. The warranty will not cover or accept responsibility for joint telegraphing, either as a "ridge" or "valley"; grain or texture telegraphing; discoloration of finished flooring due to materials used for filling of voids and defects in the face of the underlayment.
9. Unacceptable substrates shall be covered using a 1/4" or thicker panel underlayment recommended for commercial use. Follow underlayment manufacturer's installation instructions fully.

Existing Resilient Flooring

1. When installing STAINMASTER® PetProtect™ Luxury Vinyl flooring over existing resilient floors, the existing flooring must be:
 - a. Single layer only.
 - b. Thoroughly stripped of all wax, floor finish, dirt and other contaminants that may affect adhesive bond.
 - c. Be firmly bonded to the substrate.
 - d. Flat and smooth with no curling edges or loose seams.
 - e. Dry and free from excessive moisture. All concrete floors shall be tested for moisture regardless of age or grade level. Do not assume that an existing floor is free of moisture related issues. Conduct testing per Section 1.d above.
 - f. Must not be of a cushion back, loose lay, or perimeter bonded floor.
2. Problems leading to or from indentations, telegraphing of old floor or adhesion release of old floor after the STAINMASTER® PetProtect™ Luxury Vinyl flooring is installed are not the responsibility of the manufacturer.

Old Adhesives

1. Adhesive residue shall be properly prepared prior to the installation of STAINMASTER® PetProtect™ Luxury Vinyl flooring. It is recommended that mechanical scraping or grinding be used as a primary means of removing old adhesive residue.
2. Residues include, but are not limited to carpet, vinyl, VCT, and/or wood flooring adhesives.
3. Black cutback/asphalt adhesives shall be scraped by hand to remove any loose patches, trowel ridges and puddles so that only a thin residue layer remains. This layer shall then be properly covered using a Portland based patching compound properly mixed with the manufacturer's recommended latex/acrylic additive.
4. If chemical/liquid adhesive removers are utilized, the manufacturer's recommended instructions for cleaning after use of the remover shall be followed fully. The manufacturer is not responsible for any adhesive failures, indentation, bubbling, or delamination of new flooring due to improper cleaning of residue left from liquid adhesive removers.

© 2017 INVISTA. All Rights Reserved. STAINMASTER and the STAINMASTER family of marks and logos are trademarks of INVISTA. C07979

Accredited Organizations for Standard Practices

American Concrete Institute (ACI)
P.O. Box 9094
Farmington Hills, MI 48333
www.concrete.org

APA – The Engineered Wood Association (APA)
7011 S. 19th Street
Tacoma, WA 98466-5333
www.apawood.org

ASTM International
100 Barr Harbor Drive
West Conshohocken, PA, 19428-2959
www.astm.org

Resilient Floor Covering Institute (RFCI)
115 Broad Street, Suite 201
La Grange GA 30240
www.rfci.org

¹ ASTM F 710 Standard Practice for Preparing Concrete Floors to receive Resilient Flooring

COORDINATING MOLDINGS

for

OPHENIX

WE CREATE **COORDINATING MOLDINGS**, NOT PERFECT MATCHES, BECAUSE YOUR FLOORS AND OUR MOLDINGS USE DIFFERENT PRINTING METHODS & MATERIALS.

The overall flooring assembly thickness refers to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. the underlayment, either attached or loose lay and any additional vapor barriers.

Slim Trim-P29

For Flooring Up to 1/4" (6.35 mm)
3-in-1: Reducer, T-Molding, & End Cap



Slim Trim-P54

For Flooring 1/4-3/8" (6.35-9.5 mm)
3-in-1: Reducer, T-Molding, & End Cap



Slim Trim-P32

For Flooring Up to 3/4" (19 mm)
3-in-1: Reducer, T-Molding, & End Cap



VersaEdge Extra Tall

Stair Nose - 1.5" Height



Quarter Round

Standard



Quarter Round

Moisture Proof



Slim Cap

End Cap



End Cap

Moisture Proof



Reducer

Moisture Proof



T-Molding

Moisture Proof



Versatrack Shim

Used with Versatrack
For Flooring 3/8-1/2" (9.5-12.7 mm)
Optional Use with Reducer, T-Molding, & End Cap



Versatrack

For Flooring 1/4-3/8" (6-9.5 mm)
Optional Use with Reducer, T-Molding, & End Cap



All Moldings are 94" Long
1 Piece minimum

Technical Information

Sizes & Material

Slim Trim

Moisture Proof

Functions as a Reducer, T-Molding, and End Cap.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Slim Trim: PVC

SlimTrack

Included with Slim Trim-P29, Slim Cap and Slim Trim-P54

Material: Cold Roll Steel.

Versatrack Shim

1 Included with Slim Trim-P29 & Slim Cap and 2 with Slim Trim-P54

Material: Standard HDF

Dowel

Included with Slim Trim-P32

Material: Polystyrene

VersaEdge Extra Tall

Moisture Proof

Stair Nose - 1.5" Height

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Aluminum

VT-VEX Shim - Sold Separately

Material: Standard MDF/HDF

Quarter Round

Standard or Moisture Proof

Surface Material: Decorative Paper

Core Material:

Quarter Round: Standard MDF.

Moisture Proof Quarter Round: Exterior Grade Composite Wood Product

Slim Cap

Moisture Proof

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

End Cap

Moisture Proof

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

Reducer

Moisture Proof

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

T-Molding

Moisture Proof

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Exterior Grade Composite Wood Product

Versatrack (Sold Separately)

To be used with End Cap, Reducer, and T-Molding for flooring 1/4-3/8" (6-9.5mm).

Material: Cold Roll Steel

Versatrack Shim (Sold Separately)

To be used with End Cap, Reducer, and T-Molding in conjunction with the Versatrack for flooring from 3/8-1/2" (9.5-12.7mm).

Material: Standard HDF

